

Vestner Maxis

Enclosed Platform Elevator

An elegant and stylish through floor option of up to 3.5 metres. Equally suited for smaller rises and meets the needs of powered wheelchair users.

- New Zealand designed and manufactured by access specialists
- Compact design suitable for “through floor” or open mezzanine areas
- Range of models available for singular and multi-unit private dwellings and commercial environments
- Being surface installed and self-supporting the MAXIS residential series is suitable for new builds or retrofits
- NZBC and NZ Standards Compliant.

NZ
STANDARDS
AND
BUILDING CODE
COMPLIANT
LIFTS

Vestner NZ Limited

Unit 3, 6 O'Briens Rd,
Sockburn, Christchurch

1E Lady Ruby Dr,
East Tamaki, Auckland

P 0800 74 1000

E info@vestner.co.nz



Versatile Access Solutions



An elegant and stylish through-floor option

The Vestner Maxis is suitable for rises up to 3.5 metres, for new builds or retrofits.


The Vestner Maxis lift is self-supporting, and no structural wall/s are required for installation. The Maxis is suitable for a wide range of settings including retail shops, public buildings, commercial environments, education facilities and private dwellings.

Features:

- Rise up to 3.5 metres
- Automatic lower landing door and upper landing gates
- Compact & stylish design in glass
- Customised finishes available
- Suitable for indoor settings
- Limited site preparation and easy installation
- Standard power supply
- New Zealand designed and manufactured

Installation:

- Minimal Buildworks required. Straight bolt down plate onto concrete slab or timber floor without the need for a pit bore or load bearing wall.
- Lift sits 45mm proud of the floor surface and comes with a small threshold ramp. Alternatively, it can be seated in a 55mm pit for level access.
- Standard power point supply with lockable isolation switch.
- Installation when undertaken by Vestner includes inspection by an independent CBIP Certified Level 2 Lift Inspector.

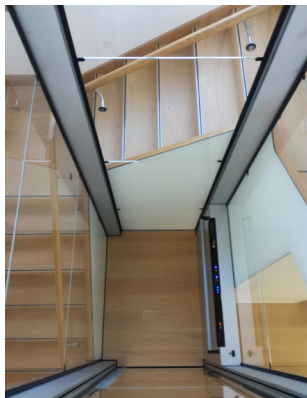

Maxis Lift Specifications

Lift Type	Maxis-Standard	Maxis-Compact
Platform size (mm)	1100 x 1400	1100 x 1100
Lift/elevator footprint (mm)	1309 x 1582	1309 x 1309
Placement	Surface mounted or pit installation	
Floor to floor rise – max (mm)	3500	
Rated Load (kg)	500	
Orientation	Entry, exit and lift control position to suit various environments	
Primary finish (other finishes available)	Silver grey, glass, black trim	

Controls		
Feature	Included	Optional
On/off key switch	✓	-
Push buttons: Up, Down, Audible Alarm, Stop	-	✓
Communication phone	✓	-
Tactile and Braille Identification	✓	-
Landing call buttons	✓	-
Remote control- handheld	-	✓
Additional controls opposite lift tower	✓	-

Safety and Security		
Feature	Included	Optional
Car handrail	✓	-
Lift Shaft Enclosure	✓	-
Upper Landing gate – manual open and self-close	-	Standard auto
Lower landing door	-	Standard auto
Battery backup and charge light	✓	-



Vestner NZ Limited

Unit 3, 6 O'Briens Rd
Sockburn, Christchurch

P +64 338 5188
E info@vestner.co.nz

1E Lady Ruby Dr
East Tamaki, Auckland

P +64 576 0545
E info@vestner.co.nz

For further information or to discuss your specific needs
free phone 0800 74 1000 or visit our website