




## IN SHAFT GOODS HOIST



## IN SHAFT GOODS HOIST

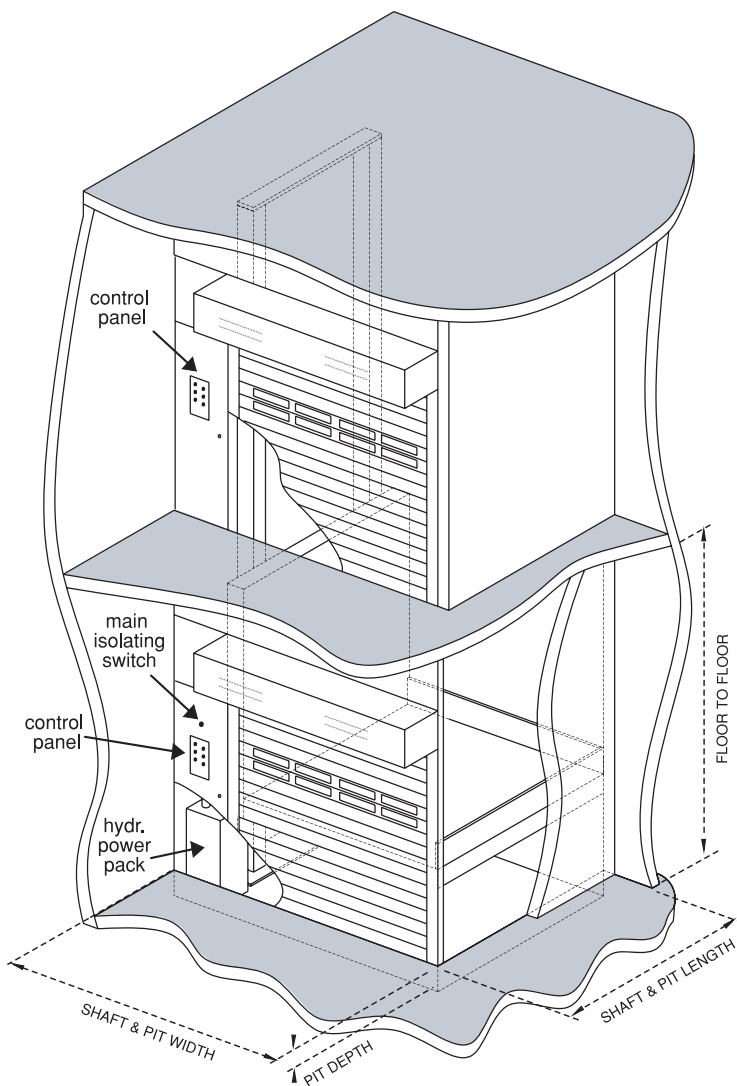

**All Southwell hoists exceed the design and safety standard requirements of the Australian Standards and all WHS regulations**

### Benefits

- Cost effective alternative to a traditional lift
- Ideal for sites with poor access for installation
- Shaft can be designed to blend into the surrounding structures for applications where presentation is important
- Minimal pit & overrun requirements
- Low maintenance costs
- Self diagnostic programmable logic control (PLC)

### Options

- Goods Personnel Hoist with safety features to AS1735 Part 3, 12, 16 & BCA E3.6.
- Walls and roof on platform – load protected during use
- Roller shutters or gates on platform – loads fully enclosed during use
- Platform finishes - industrial enamel, 2 pack epoxy, stainless steel, aluminium chequer plate, industrial grade vinyl etc
- Doors – aluminium with viewing panel, steel, stainless steel, fire rated roller shutters, with standard high duty cycle door motors, swing doors, fire rated swing doors
- Doors can be same sides, opposite side or 90 degrees or walkthrough.
- Additional doors for double entry/exit of hoist
- 2 level, 3 level, 4 level or more.
- Fabricated steel chequer plate ramp when pit is not possible
- 12 metres per minute lift speed
- Twin mast self supporting units up to 10T capacity available.
- Custom configurations & capacities available on request
- Free Standing Goods Hoist & Car Hoists also available.

### MAIN DIMENSIONS

MODEL	SGH-0909	SGH-1515	SGH-2018	SGH-2418	SGH-2424	SGH-3024
Platform (l x w)	0.9m x 0.9m	1.5m x 1.5m	2.0m x 1.8m	2.4m x 1.8m	2.4m x 2.4m	3.0m x 2.4m
Capacity	350kg	1500kg	1000kg	1000kg	1500kg	1500kg
Shaft Length	970mm	1540mm	2040mm	2440mm	2440mm	3040mm
Shaft Width	1400mm	2000mm	2300mm	2300mm	3000mm	3000mm
Pit Depth	90mm	125mm	125mm	125mm	195mm	195mm

Note: Above measurement may vary for Goods Personnel Option. Contact Southwell for details.

WARRANTY 1 year full warranty and 10 year structural warranty