



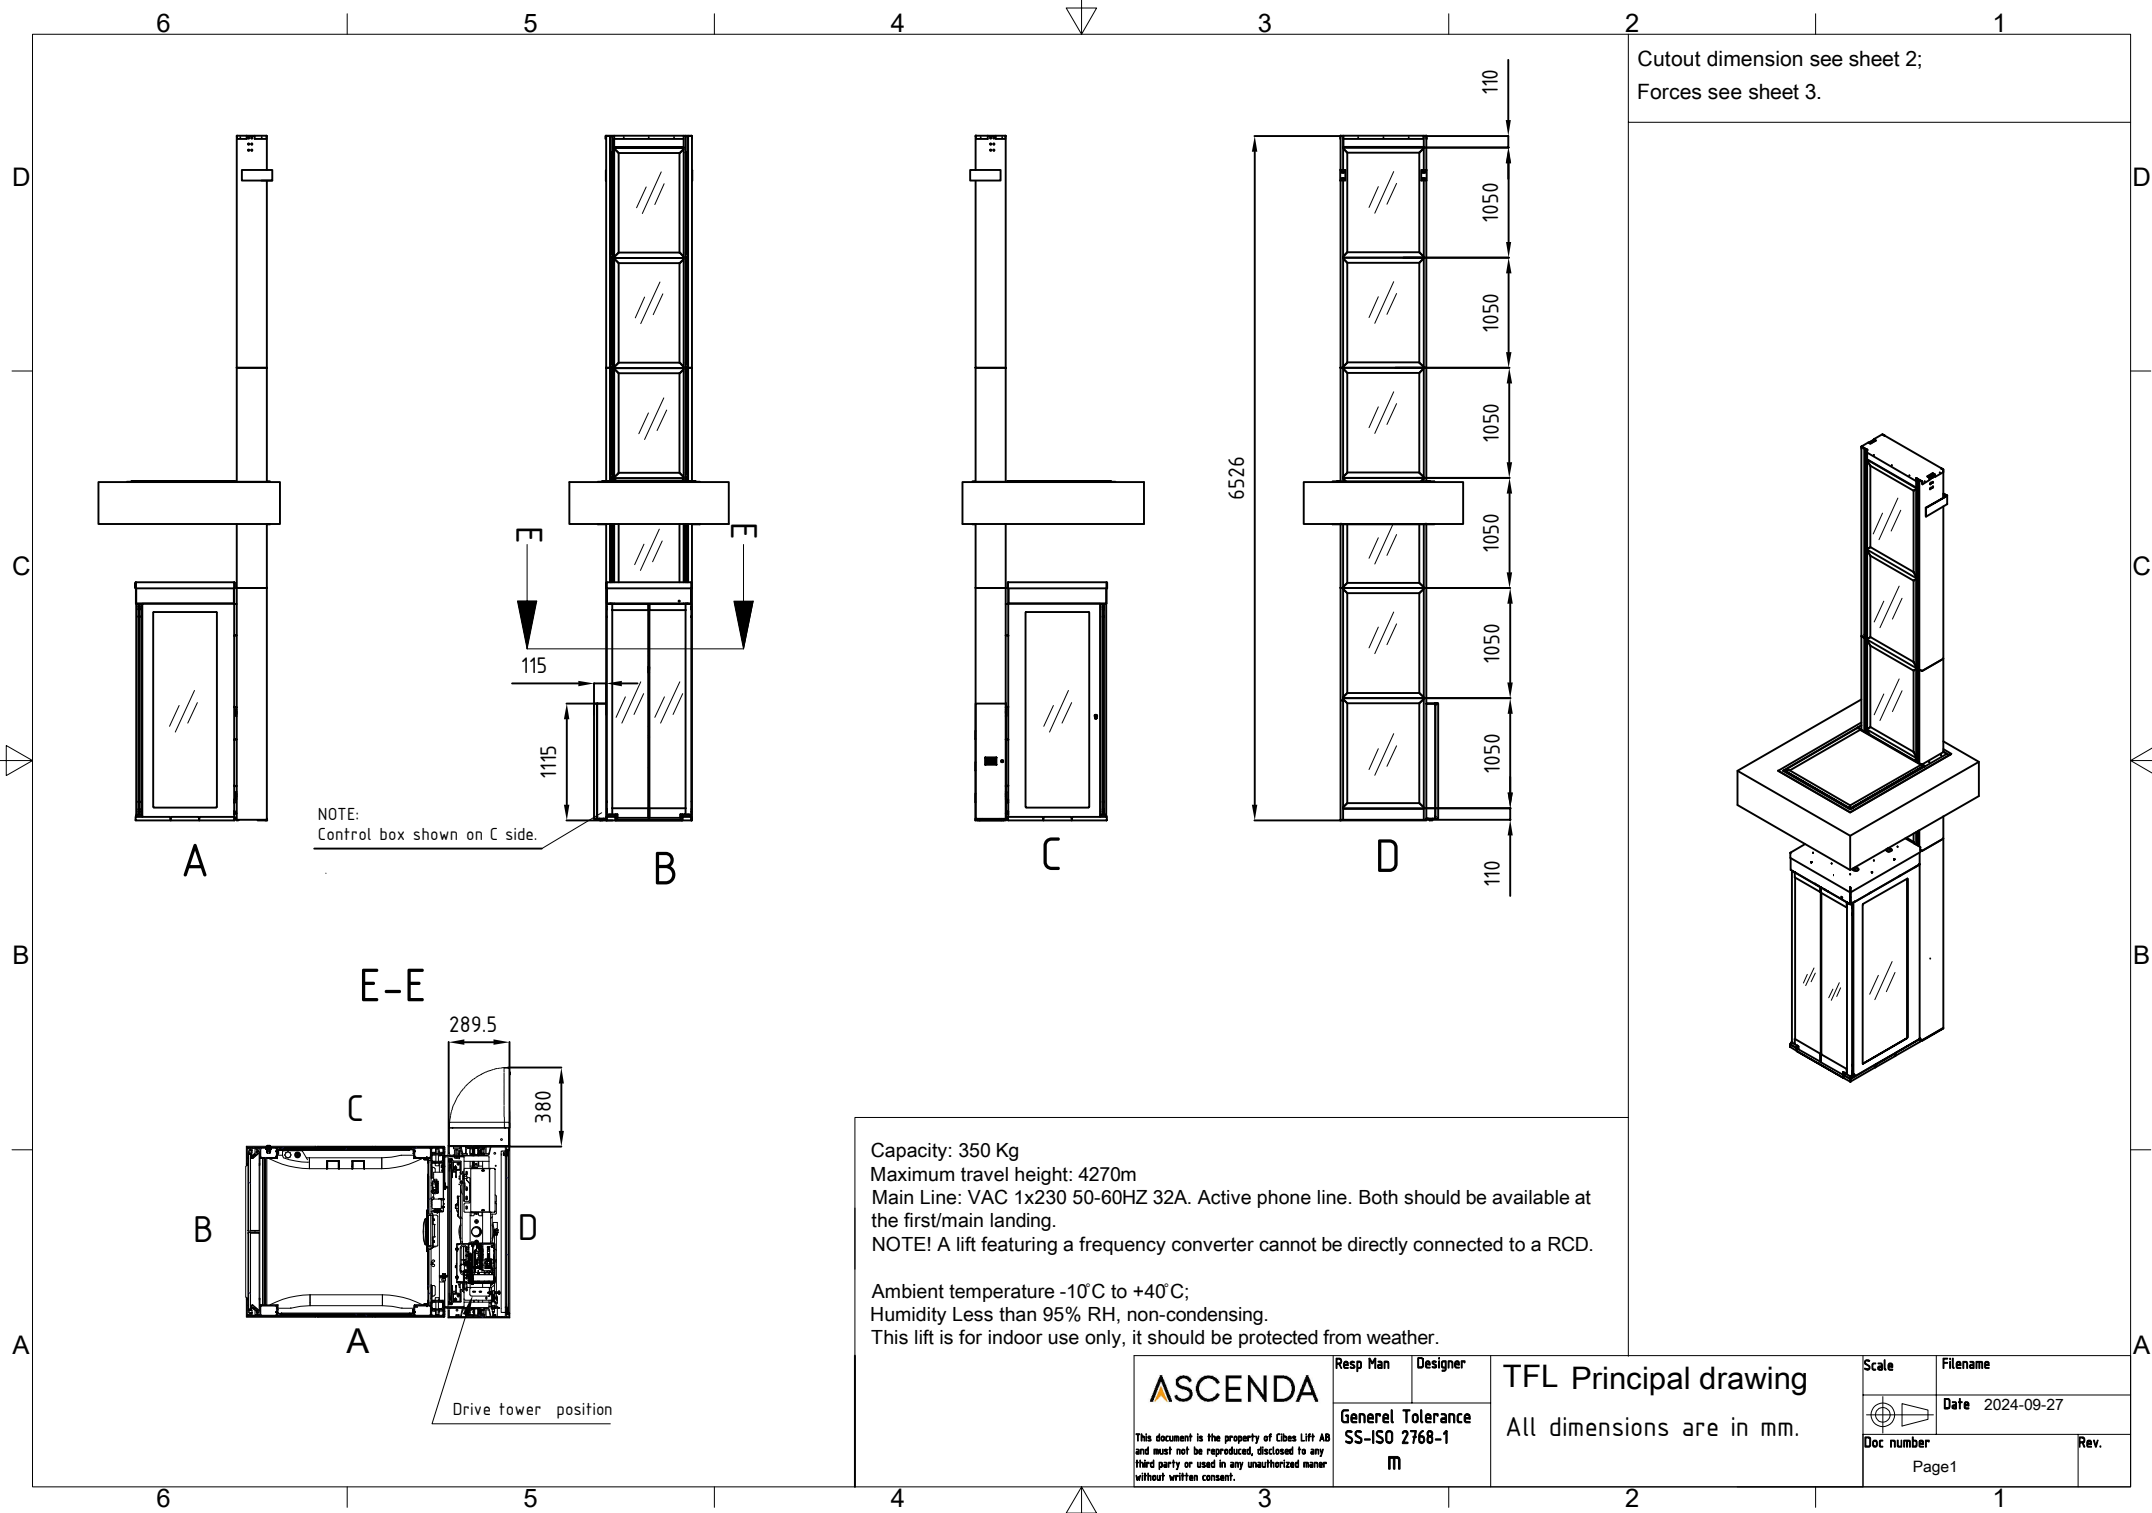

Cutout sizes

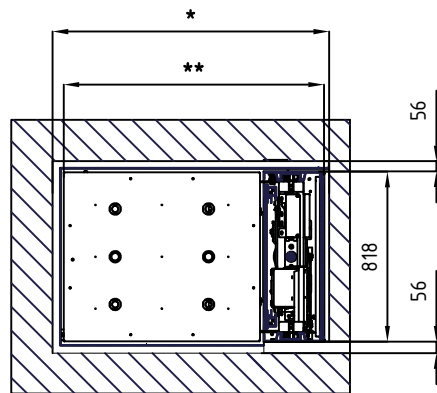

A-A

Minimum overhead :2300

Minimum travel height: 2300
Maximum travel height: 4270

Minimum clear height: 2150

Hatch shown

NOTE: Standard hatch floor insert is suitable for floors between 100–450 mm thick.

NOTE: Shown on the A side but can also be installed on the C side, see page 1.

Size	*(mm)	**(mm)
S (600x700)	1132	1059
M (800x700)	1332	1259
L (1000x700)	1532	1459

ASCENDA This document is the property of Cibes Lift AB and must not be reproduced, disclosed to any third party or used in any unauthorized manner without written consent.	Resp Man	Designer	TFL Principal drawing All dimensions are in mm.	Scale	Filename
	General Tolerance SS-ISO 2768-1 m				Date 2024-09-27
				Doc number	Rev.
				Page 2	